

SPECIFICATIONS

	IC-F3263DT/DS	IC-F4263DT/DS
GENERAL		
Frequency coverage	136–174 MHz	350–400 MHz 400–470 MHz 450–520 MHz
Number of channels	512 channels/128 zones	
Type of emission	16K0F3E/8K50F3E/4K00F1E/F1D	
Channel spacing	25/12.5/6.25 kHz	
Power supply requirement	7.5 V DC nominal	
Current drain (approximate)		
Tx High (at 5 W)	1.7 A	1.8 A
Rx Rated output/Standby	550 mA/160 mA	550 mA/160 mA
Antenna impedance	50 Ω	
Operating temperature range	–30 °C to +60 °C (Radio specifications)	
Dimensions (W × H × D)	53.5 × 142.7 × 39.5 mm (With BP-232WP)	
Weight (approximate)	400 g (With BP-232WP, MB-94R & FA-SC57U)	
TRANSMITTER		
Output power (at 7.5 V DC)	5 W, 2 W, 1 W (Hi, L2, L1)	
Max. frequency deviation	±5.0/±2.5 kHz (Wide, narrow)	
Frequency stability	±1.0 ppm	
Spurious emissions	78 dB typ.	
FM Hum and noise	48/43 dB typ. (W/N)	46/40 dB typ. (W/N)
Audio harmonic distortion	1.5% typ. (AF 1 kHz 40% deviation)	
FSK error	2.0% typ.	
Ext. microphone connector	14-pin multi-connector/2.2 kΩ	
RECEIVER		
Sensitivity (Analogue)	0.23 μV typ. (at 12 dB SINAD)	
(Digital)	0.20 μV typ. (at 5% BER)	
Adjacent channel selectivity	78/68/60 dB typ. (W/N/D)	75/68/60 dB typ. (W/N/D)
Spurious response rejection	76 dB typ.	
Intermodulation rejection	75/75/66 dB typ. (Wide, narrow, digital)	
Hum and noise	52/47 dB typ. (W/N)	48/43 dB typ. (W/N)
Audio output power (at 5% distortion)	800 mW typ. (Internal SP, 12 Ω load) 1000 mW typ. (External SP, 8 Ω load)	
Ext. speaker connector	14-pin multi-connector/8 Ω	
GPS (Depending on version)		
Receiver channels	12 channels	
Time to first fix (cold start)	36 seconds typ. (at open sky)	
Horizontal accuracy	5 m (at open sky)	

Measurements made in accordance with EIA/TIA-603. All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	–
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard (IC-F3263D/F4263D, BP-232WP and HM-184)	
Dust & Water	IP67 (Dust-tight and waterproof protection)

Supplied accessories: (May differ according to version)

- Battery pack, BP-232WP
- Belt clip, MB-94R
- Antenna

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. IDAS and IDAS logo are trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. LTR is a trademark of E. F. Johnson Technologies Inc. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world **Count on us!**

Icom America Inc.
12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom Canada
Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Brazil
Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrasil.com

Icom (Europe) GmbH
Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom Spain S.L.
Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (UK) Ltd.
Blacksale House, Allira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom France s.a.s.
Zac de la Plaine,
1 Rue Brindjone des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom (Australia) Pty. Ltd.
Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Shanghai Icom Ltd.
No.101, Building 9, Caifuxingyuan Park,
No.188 Maoting Road, Chedun Town,
Songjiang District, Shanghai, 201611, China
Phone: +86 (021) 6153 2768
Fax: +86 (021) 5765 9987
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Your local distributor/dealer:

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACK AND CASES



Battery packs and cases	Type	Capacity
BP-232WP	Rechargeable Li-ion	2200 mAh (min.) 2350 mAh (typ.)
BP-240	LR03 (AAA) batteries × 6	
BP-261	LR6 (AA) batteries × 6	

REGULAR CHARGER



BC-171*
Charges the BP-232WP in 8–10 hours (approx.).

RAPID CHARGER



BC-160*
Charges the BP-232WP in 3 hours (approx.).

MULTI-CHARGER



BC-197 BC-157S
Charges up to six BP-232WP battery packs in 3.5 hours (approx.).

SPEAKER-MICROPHONE



HM-184H

HEADSETS and PTT SWITCH CABLE



HS-94 Earhook type
HS-95 Behind-the-head type
HS-97 Throat type
VS-4MC Required when using any of these headsets

BELT CLIPS



MB-93 MB-94R

LEATHER BELT HANGERS



MB-96N MB-96F MB-96FL

CHARGER BRACKET



MB-130
For use with BC-160

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLE



CP-23L For use with BC-160
OPC-656 For use with BC-197

ACC ADAPTOR



AD-118 For use with Hirose Plug Accessory

ZONE COPY CABLES

- OPC-1870: Handheld to handheld cable
- OPC-1871: Handheld to mobile cable

CHARGER ADAPTOR

- AD-122: AD-122 charger adaptor is supplied with the BC-197, depending on BC-197's version.

STUBBY ANTENNAS

- FA-SC56VS: 150–162 MHz
- FA-SC57VS: 160–174 MHz
- FA-SC73US: 450–490 MHz

CUT ANTENNAS

- FA-SC61VC: 136–174 MHz
- FA-SC61UC: 380–520 MHz

HIGH-GAIN ANTENNAS

- FA-SC62V: 150–160 MHz
- FA-SC63V: 155–165 MHz

ANTENNAS

- FA-SC25V: 136–150 MHz
- FA-SC55V: 150–174 MHz
- FA-SC25U: 400–430 MHz

ANTENNAS

- FA-SC57U: 430–470 MHz
- FA-SC72U: 470–520 MHz
- FA-SC01U: 350–400 MHz
- FA-SC02U: 330–380 MHz
- FA-SC03U: 380–430 MHz



Check our web site to know more about 6.25 kHz FDMA narrow band.
www.icom.co.jp/world/fdma/



IC-F3263DT

VHF transceiver with full keypad

IC-F4263DT

UHF transceiver with full keypad

IC-F3263DS

VHF transceiver with simple keypad

IC-F4263DS

UHF transceiver with simple keypad

Full-Featured IDAS™ Digital Handheld with Built-in GPS and Waterproof Protection



Built-in GPS Receiver*

Man Down Function*

IP67 Waterproof Protection

800 mW Audio Output Power

IDAS™ NXDN™ Features

512 Memory Channels with 128 Zones

(* Depending on version)



IDAS™: Improved, Enhanced & More Versatile



IP67 Waterproof & Dustproof Protection



The IC-F3263D series provides rugged protection against dust and water that is equivalent to IP67. The radio can withstand 1 m depth of water for 30 minutes.

Man Down and Lone Worker Functions for Emergency Call

The man down function* automatically sends an emergency signal when the transceiver is left in a horizontal position. The lone worker function also can transmit an emergency signal when the radio is not operated for a preset period. These emergency signals can be sent with GPS position data* to alert your co-workers or dispatch of any potential trouble.

* Depending on version.

800 mW (typ.) Audio Output Power



The built-in BTL amplifier doubles the audio output power and the large 40 mm speaker delivers loud 800 mW (typ.) audio to receive all calls under noisy environments.



IC-F3263DT
(Full keypad)



IC-F4263DS
(Simple keypad)

Built-in GPS Receiver*

Your current position data can be attached to a voice or data (SDM, status or emergency signal) transmission and can be sent to dispatch stations*.

* Depending on version. * To show the received position data, an external PC application is required.



14-pin Accessory Connector

The new 14-pin accessory connector enhances audio output capabilities with the built-in BTL amplifier. The optional HM-184/H speaker-microphone has a 1000 mW (typ.) audio output for loud and clear communications.



Large Full Dot-Matrix LCD

Using a large full dot-matrix LCD (32 x 18 mm), the IC-F3263D series shows two lines of easy-to-read text messages. The bottom row shows assigned functions to the [P0] to [P3] buttons.


Long Lasting Battery Life

GPS type	Digital mode	Analogue mode
Built-in GPS type	10.5 hours (approx.)	11 hours (approx.)
Non GPS type	12 hours (approx.)	12.5 hours (approx.)

* Typical operation in 5:5:90 duty cycle, power save on.


IDAS™ expands coverage and capacity

Conventional

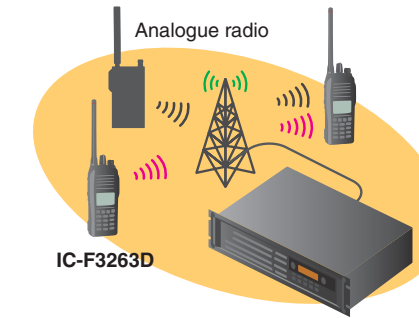


- 6.25 kHz digital migration
- Digital/analogue mixed mode operation

Multi-Site Conventional

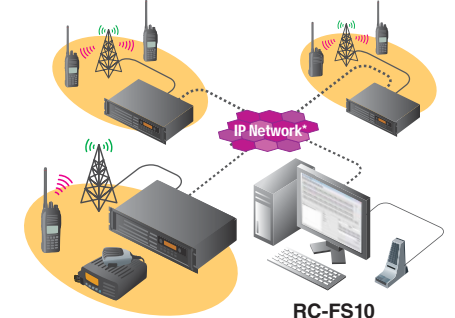


- Up to 16 IDAS repeater sites connection over an IP network.
- RC-FS10, PC dispatch station

Type-D Single Site Trunking

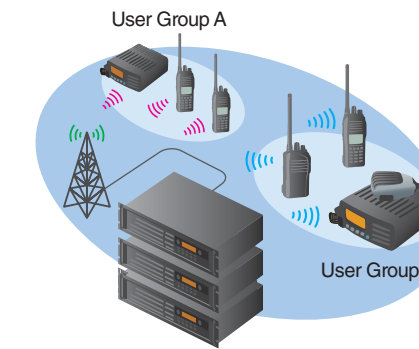

- Distributed channel system which does not use a dedicated control channel
- Up to 30 channels per system
- Up to 2,000 individual IDs and up to 2,000 group IDs

Type-D Multi-Site Trunking

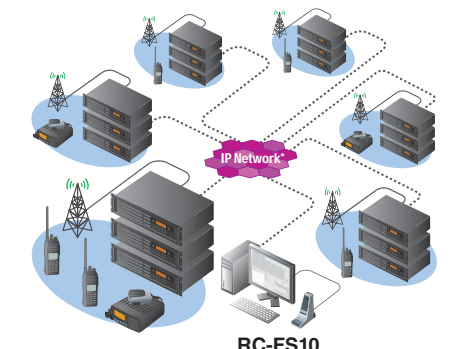

- Distributed channel system
- Up to 30 channels per site and up to 48 sites connection over an IP network
- Up to 60,000 individual IDs and 60,000 group IDs with fleet management
- Automatic site roaming
- ESN authentication
- RC-FS10 PC dispatch

All advantages shown represent possible system configurations. Ask your Icom dealer to configure an IDAS system that works best for you.

*Note: Private IP Network or VPN tunnels through the Internet with static endpoints.

IDAS™ Features

The IC-F3263D series provides NXDN™ CAI-based IDAS digital mode operation. It is also compatible with NXDN™ Type-D multi-site trunking. The following IDAS features are programmable.

- Individual/group call
- Individual ID and talkgroup ID memories
- Status message
- GPS
- Radio check
- Call alert
- Emergency
- Block decode
- SDM (Short Data Message)
- Stun, kill and revive
- Remote monitor
- Call log
- Digital voice scrambler
- RAN (Radio Access Number)

Built-in 2-Tone and 5-Tone*

2-Tone and 5-Tone signalings give you selective calling, quiet stand-by and other convenient functions. The radio stun and kill functions disable a radio over the air and the revive function restores the stunned radio.

MDC 1200 Compatible*

The built-in MDC signaling provides the following selective calling and ANI features.

- PTT ID
- SelCall
- Radio check
- 500 aliases
- Status message/request
- Call alert
- Emergency, emergency mic monitoring

Scan Features

The IC-F3263D series can detect both analogue and IDAS conventional signals and automatically selects the transmission mode to reply to the received call.

Built-in Voice Scrambler

The built-in inversion voice scrambler* provides secure conversation in analogue mode. When using IDAS digital mode, the digital voice scrambler provides a 15-bit key (about 32,000 codes) as standard.

* Inversion voice scrambler is not compatible with UT-109R/UT-110R voice scrambler.

Other Features

- 512 memory channels with 128 zones
 - 5 W output power both in VHF and UHF
 - Basic LTR™ mode operation*
 - CTCSS/DTCS encoder/decoder*
 - MIL-STD 810 G rugged construction
 - 8 DTMF autodial memories
 - Tactical group function
 - Busy channel lockout, repeater lockout
 - Power on password
 - Time-out timer
 - Low battery alert
 - Surveillance function
 - Talk around function
 - Escalating alarm
- (* = Analogue mode only)

VHF DIGITAL/ANALOGUE TRANSCEIVERS
IC-F3263DT
IC-F3263DS

UHF DIGITAL/ANALOGUE TRANSCEIVERS
IC-F4263DT
IC-F4263DS