

Compact, Waterproof Professional Radio with 1500 mW Powerful Audio




IC-V88
With optional stubby antenna

- Icom custom high power handling capacity speaker for 1500 mW powerful audio
- IP67 waterproof and dust-tight protection
- 5.5 W/4 W (VHF/UHF) of output power
- Up to 10 hours of operating time with the supplied waterproof battery
- 128 memory channels and eight zones
- Eight character alphanumeric display
- Built-in CTCSS and DTCS encoder/decoder
- Eight DTMF autodial memories
- MDC 1200 PTT ID and BIIS 1200 PTT ID
- Inversion voice scrambler (16 code) for private conversations
- Channel announcement of the operating channel number
- Seven programmable buttons with Shift key function
- 16 scan lists and priority scan functions
- Hands-free operation with the optional headset



IC-U88

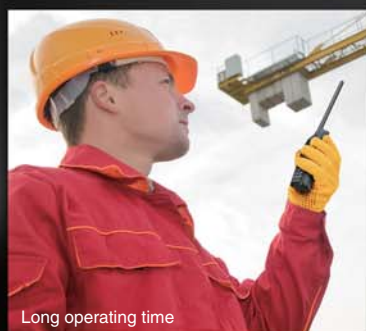

Long operating time



Waterproof for 30 minutes at one meter



1500 mW powerful audio

SPECIFICATIONS

GENERAL	IC-V88	IC-U88
Frequency coverage	136–174 MHz	335–380 MHz
Type of emissions	16K0F3E, 11K0F3E (25/12.5 kHz)	
Number of channels	128 channels	
Antenna impedance	50 Ω	
Power supply requirement	7.5 V DC	
Operating temperature range	–30 °C to +60 °C (Radio only)	
Frequency stability	±2.5 ppm	
Current drain (Approximate)		
Tx High	1.5 A	1.3 A
Rx Maximum audio/Stand-by	500 mA (Internal SP) / 77 mA	500 mA (Internal SP) / 80 mA
Dimensions (W×H×D) (Projections not included)	52.2 × 111.8 × 22.3 mm (with BP-278)	
Weight (Approximate)	230 g (with BP-278)	

TRANSMITTER

Output power (at 7.5 V DC)	5.5/ 2.0/ 1.0 W (Hi/L2/L1)	4.0/ 2.0/ 1.0 W (Hi/L2/L1)
Maximum frequency deviation	±5.0 kHz/±2.5 kHz (Wide/Narrow)	
Spurious emissions	70 dB minimum	
External microphone connector	3-conductor 2.5 (d)mm (1/10")/2.2 kΩ	

RECEIVER

Sensitivity	0.25 μV typical (at 12 dB SINAD)	
Squelch sensitivity	0.25 μV typical (at threshold)	
Adjacent channel selectivity	76 dB/ 53 dB typical (W/N)	73 dB/ 56 dB typical (W/N)
Intermodulation	74 dB typical	73 dB typical
Spurious response	70 dB minimum	
Audio output power		
Internal speaker	1500 mW typical (8 Ω load)	
External speaker	400 mW typical (8 Ω load)	
External speaker connector	3-conductor 3.5 (d) mm (1/8")/ 8 Ω	

Measurements made in accordance with EIA/TIA-603.

All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	–
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard

Dust & Water	IP67 (Dust-tight and waterproof protection)
--------------	---

Supplied accessories: (May differ, depending on version)

- Battery pack, BP-278
- Desktop charger, BC-213
- AC adapter, BC-123SA/SE
- Belt clip, MB-133
- Antenna

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



Battery packs	Type	Capacity	Operating time*
BP-278	Rechargeable Li-ion	1130 mAh (min.) 1190 mAh (typ.)	Up to 10 hours
BP-279	Rechargeable Li-ion	1485 mAh (min.) 1570 mAh (typ.)	Up to 14 hours
BP-280	Rechargeable Li-ion	2280 mAh (min.) 2400 mAh (typ.)	Up to 20 hours

* Tx: Rx: standby = 5:5:90. Power save function ON.

RAPID CHARGER



Charges the BP-278 in 2 hours (Approximate).

MULTI-CHARGER



Charges up to six radios and/or battery packs at the same time.

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLE



For use with the BC-213. For use with the BC-214.

*1 BC-123SA for the USA plug, SE for the European plug, SV for Australian plug.

SPEAKER-MICROPHONES




EARPHONE-MICROPHONES



HEADSETS



PTT SWITCH CABLE & PLUG ADAPTER CABLE



*2 Either the VS-4LA or OPC-2004LA is required when using the HS-97.

CHARGER BRACKET



For use with the BC-213.

BELT CLIP



Alligator type Same as supplied.

VHF ANTENNAS

- FA-SC25V: 136–150 MHz
- FA-SC55V: 150–174 MHz

UHF ANTENNAS

- FA-SC01U: 350–400 MHz
- FA-SC02U: 330–380 MHz

CUT ANTENNA

- FA-SC61VC: 136–174 MHz

HIGH GAIN ANTENNAS

- FA-SC62V: 150–160 MHz
- FA-SC63V: 155–165 MHz

STUBBY ANTENNAS

- FA-SC26VS: 136–144 MHz
- FA-SC27VS: 142–150 MHz
- FA-SC56VS: 150–162 MHz
- FA-SC57VS: 160–174 MHz

CHARGER ADAPTER

- AD-130
- AD-130 charger adapter is supplied with the BC-214.



The "3D GENUINE Icom label" is attached for proof of authentication. Check the Icom website for details: <http://www.icom.co.jp/world/genuine-info/>

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world **Count on us!**

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com